

NR-900 Hire Chiller

NR-900 Hire Chiller

Product Overview

- Robust design** – Specifically designed for demanding process cooling applications
- Ecodesign compliant** – all models fully comply with ErP2021 – SEPR HT (EU) 2016/2281 – SEPR MT (EU) 2015/1095
- Wide operating range** – operates in ambient temperatures from +45°C down to -10°C with cooling fluid supply temperatures between +20°C and -10°C
- Eco-friendly** – built around the latest high-efficiency scroll compressors utilising low GWP R454B refrigerant
- Shell & tube evaporator** – a robust solution providing greater dependability compared to more traditional designs
- Coated condenser coils** – aluminium microchannel construction results in a smaller refrigerant charge – while epoxy coating offers protection in potentially aggressive environments
- Dual independent refrigeration circuits** – additional resilience provides greater peace of mind
- Isolation valves & strainers** – fitted to fluid connections



Performance Data

Nominal Cooling Capacity (1) 855 kW
 Nominal Power Consumption (1) 225 kW
 EER (1)..... 3.80 kW/kW

Operating Limits

Minimum/Maximum Cooling Fluid Flow Rate 82/204 m³/hr

Electrical Data

Power Supply400/3/50 V/ph/Hz
 Power Connections – Hard Wired 2 x 120 mm² cables
 Maximum Running Current541 A
 Maximum Starting Current798 A
 IP Rating.....IP54

Cooling Circuit

Refrigerant / Compressor TypeR454B/Scroll
 Number of Compressors / Circuits / Fans8/4/12

Hydraulic Circuit

Nominal Cooling Fluid Flow Rate (1)147 m³/hr
 Nominal Evaporator Pressure Drop (1) 54 kPa
 Connections6" Flanged

Physical Data

Length (2)7,430 mm
 Width (2)2,260 mm
 Height (2)2,560 mm
 Operating Weight (2)5,750 kg
 Sound Pressure Level (2)64 dB(A)

(1) Performance data based on operating conditions of +7°C cooling fluid outlet temperature / +12°C cooling fluid inlet temperature / +30°C ambient temperature

(2) Sound pressure at 10m average value obtained in a free field on a reflecting plane at a distance of 10m from the unit, non-binding value calculated from the sound power level

Still have a question?

Get in touch with one of our expert team today.


- ☎ 01422 371711
- ✉ sales@newsome.ltd.uk
- 🌐 www.newsome.ltd.uk






NR-900 Hire Chiller

Cooling Capacity

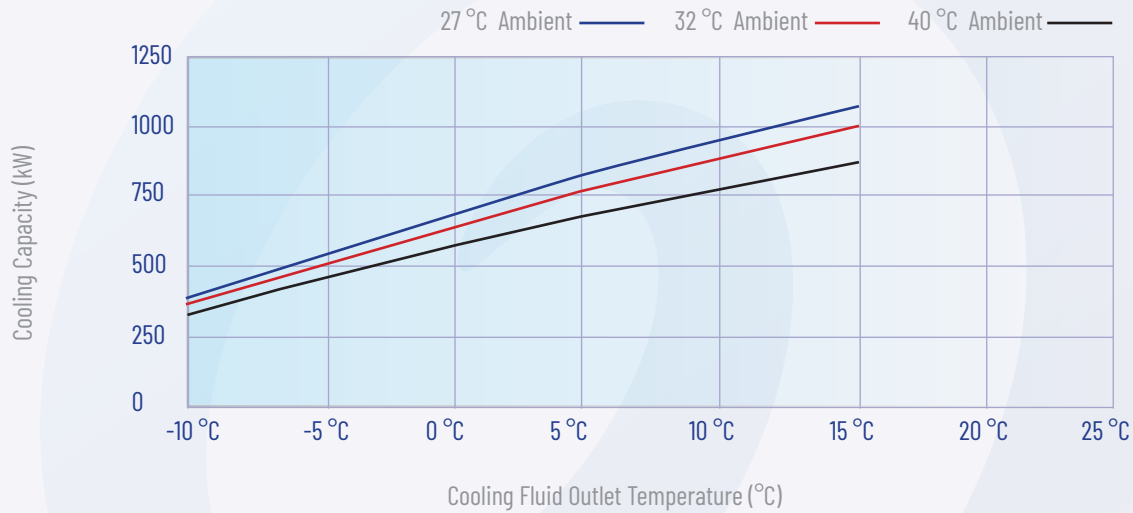

Nominal Running Capacity

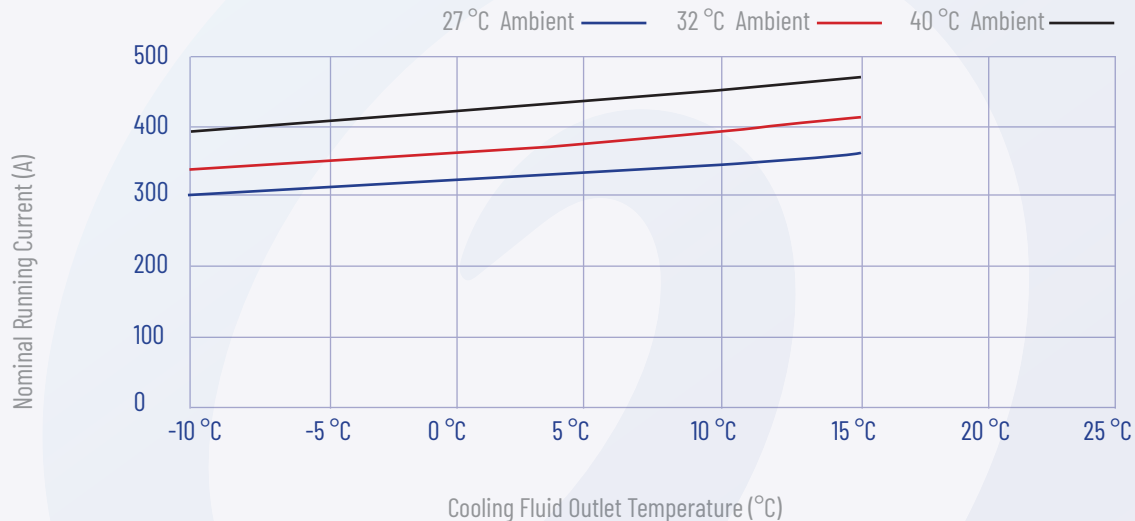

The level of performance provided by each machine depends on the conditions at which it is operating. The two factors determining performance are ambient air temperature and the required cooling fluid outlet temperature. The above graphs illustrate the cooling capacity and nominal running current - at three different operating ambient temperatures - based on differing cooling fluid outlet temperatures.

