

# NR-DH71 Desiccant Dehumidifier

NR-DH71

## Product Overview

**Desiccant rotor** – located at the heart of the machine the washable rotor is designed to absorb moisture without the need for a refrigeration circuit

**Robust construction** – complete with stainless steel chassis, panels & crash frame

**Digital controller** – possible for the user to set a desired set point using the integrated controller in conjunction with humidistat


**Integrated heat recovery** – provides pre-heat for the 'regeneration' section to reduce energy consumption – operation is fully managed by the unit's controller

**Filtration section** – can be easily accessed for cleaning & replacement of dirty filters when necessary



## Operating Principles

There are two air streams of differing flow rates – typically having a ratio of approximately 3:1. The greater 'process' flow is dried as it passes through the dehumidifier – while the smaller 'regeneration' flow is used to heat the rotor material to drive the absorbed moisture vapour from the desiccant. The moisture removed from the process air is transferred as the rotor slowly turns.

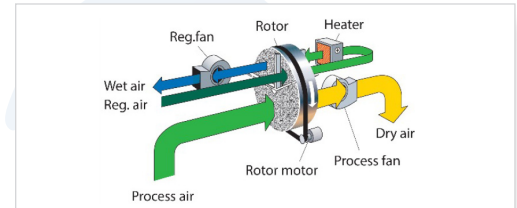

## Performance Data

Nominal Extraction Capacity (1) .....	13 kg/hr
Nominal 'Dry' Air Flow Rate .....	2,500 m <sup>3</sup> /hr
Maximum 'Dry' Air External Static Pressure .....	400 Pa
Nominal 'Wet' Air Flow Rate .....	800 m <sup>3</sup> /hr
Maximum 'Wet' Air external Static Pressure.....	300 Pa

### Operating Limits

Maximum Inlet Air Temperature.....	40 °C
Minimum/Maximum Ambient Temperatures .....	-20/50 °C

### Electrical Data

Power Supply .....	400/3/50 V/ph/Hz
Power Connection .....	32 A 5 Pin Plug

### Spigot Connections

'Process' Air Inlet .....	395 x 310 mm (w x h)
'Regeneration' Air Inlet.....	225 x 210 mm (w x h)
'Dry' Air Outlet.....	300 mm Ø
'Wet' Air Outlet.....	200 mm Ø

### Filtration - Process / Regeneration Circuits

Grade .....	G4+F7
-------------	-------

### Heater - Regeneration Circuit

Heating Capacity .....	12.5 / 17.0 kW
Control Steps.....	2

### Physical Data


Length (2) .....	1,450 mm
Width (2).....	1,000 mm
Height (2).....	1,590 mm
Operating Weight (2) .....	230 kg

(1) Performance data based on 'process' inlet air conditions of +20°C / 60% R.H.

(2) Dimensions / weights include crash frame

## Still have a question?

Get in touch with one of our expert team today.


-  01422 371711
-  sales@newsome.ltd.uk
-  www.newsome.ltd.uk






# NR-DH71 Desiccant Dehumidifier

## Dehumidifying Capacity

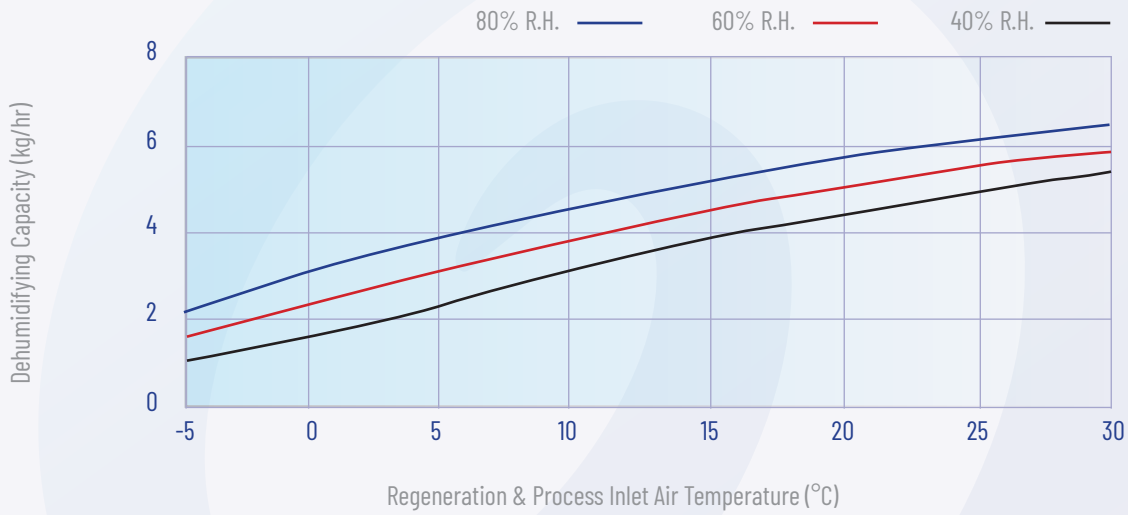

## Process Outlet Air Temperature

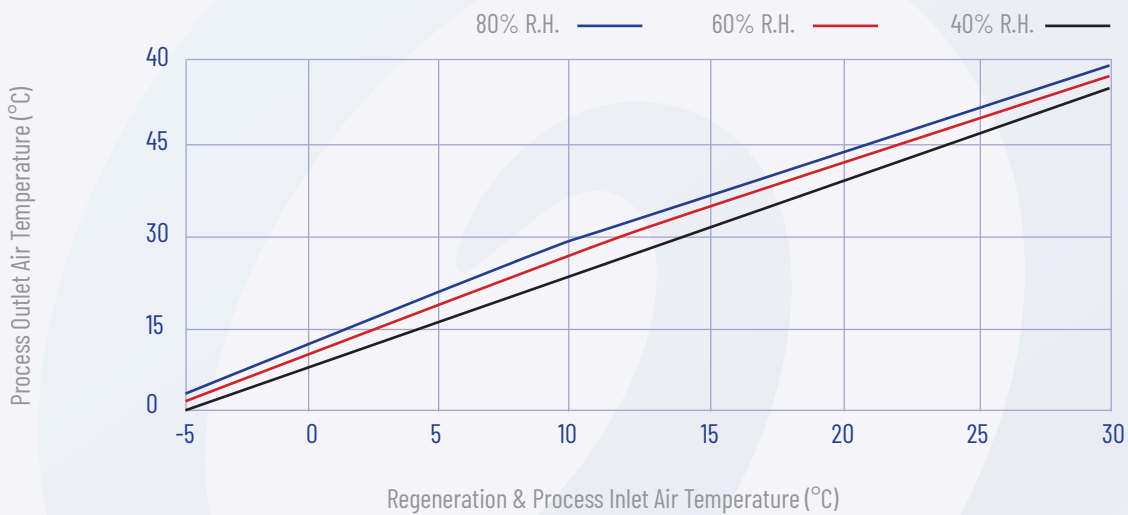

The level of performance provided by each machine depends on the conditions at which it is operating. The factors determining performance are the temperature & relative humidity (R.H.) of the inlet air. The above graph illustrates the dehumidifying capacity - at three different R.H. levels - based on differing inlet air temperatures.

