

# NR-HP160 Heat Pump

NR-HP160

## Product Overview

**Reversible** – Designed for a complete range of heating & cooling applications – both comfort and industrial process.

**Ecodesign compliant** – all models fully comply with minimum efficiency directive (EU) 813/2013.

**Wide operating range** – capable of hot water production of up to +55°C in most conditions – or up to +42°C while operating in minimum ambient condition of -15°C.

**Eco-friendly** – built around the latest high-efficiency scroll compressors utilising low GWP R454B refrigerant.

**Isolation valves & strainers** – fitted to fluid connections



## Performance Data

### Performance Data - Heating

Nominal Heating Capacity (1) .....	144 kW
Nominal Power Consumption (1) .....	45.2 kW
COP (1) .....	3.19 kW/kW

### Performance Data - Cooling

Nominal Cooling Capacity (2) .....	142 kW
Nominal Power Consumption (2) .....	44.7 kW
EER (2) .....	3.18 kW/kW

### Operating Limits

Minimum/Maximum Heating/Cooling Fluid Flow Rate .....	15/39 m <sup>3</sup> /hr
---	--------------------------

### Electrical Data

Power Supply .....	400/3/50 V/ph/Hz
Power Connections - Hard Wired .....	70 mm <sup>2</sup> cables
Maximum Running Current .....	112 A
Maximum Starting Current .....	363 A
IP Rating .....	IP54

### Refrigeration Circuit

Refrigerant / Compressor Type .....	R454B/Scroll
Number of Compressors / Circuits / Fans .....	2/1/2

### Hydraulic Circuit

Nominal Heating Fluid Flow Rate (1) .....	25.0 m <sup>3</sup> /hr
Nominal heat Exchanger Pressure Drop (1) .....	32 kPa
Connections .....	4" Flanged

### Physical Data

Length .....	3,360 mm
Width .....	1,195 mm
Height .....	1,980 mm
Operating Weight .....	1,500 kg
Sound Pressure Level (3) .....	72 dB(A)

(1) Heating performance data based on operating conditions of +45°C heating fluid outlet temperature / +40°C cooling fluid inlet temperature / +7°C ambient temperature

(2) Cooling performance data based on operating conditions of +7°C cooling fluid outlet temperature / +12°C cooling fluid inlet temperature / +30°C ambient temperature

(3) Sound pressure at 1m average value obtained in a free field on a reflecting plane at a distance of 10m from the unit, non-binding value calculated from the sound power level

## Still have a question?

Get in touch with one of our expert team today.


- ☎ 01422 371711
- ✉ sales@newsome.ltd.uk
- 🌐 www.newsome.ltd.uk






# NR-HP160 Heat Pump

## Heating Capacity

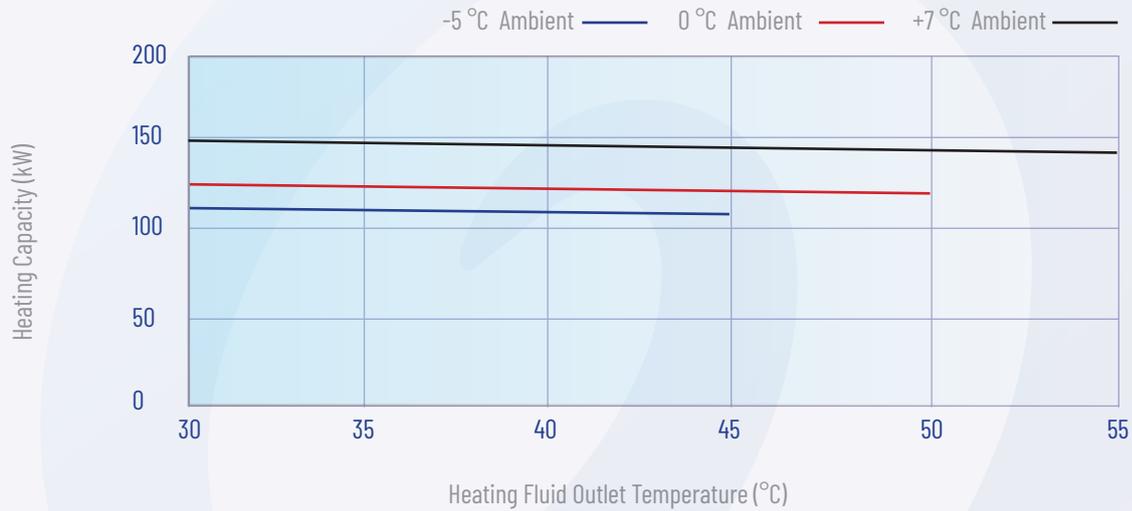


## Nominal Running Current - Heating

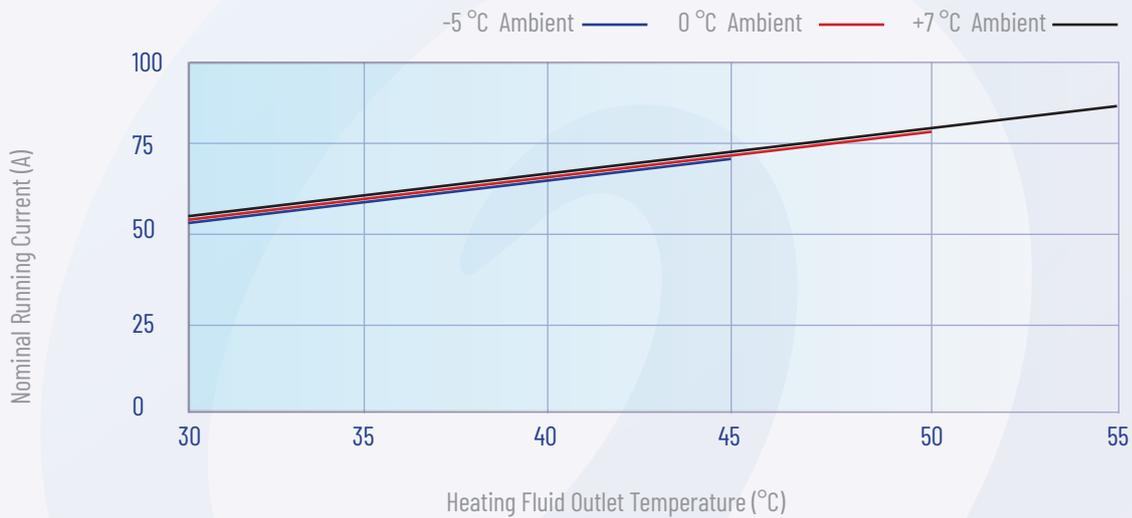




# NR-HP160 Heat Pump

## Cooling Capacity

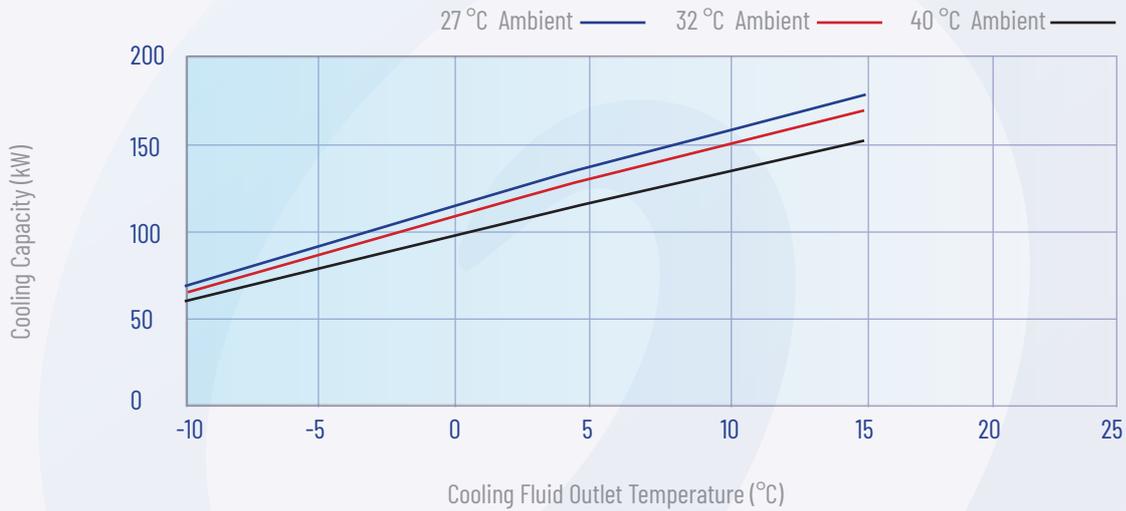

## Nominal Running Current - Cooling

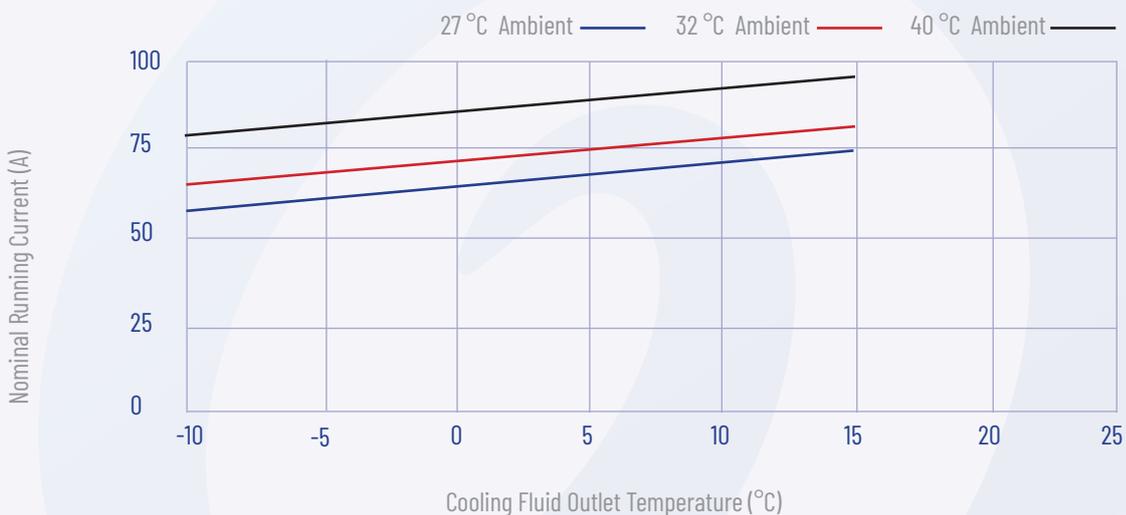

The level of performance provided by each machine depends on the conditions at which it is operating. The two factors determining performance are ambient air temperature and the required heating / cooling fluid outlet temperature. The above graphs illustrate the heating / cooling capacities and nominal running current - at three different operating ambient temperatures - based on differing fluid outlet temperatures.

